

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

ROBERT L. BLAKE ET AL

GB 000112

Serial No.


Group Art Unit

Filed: CONCURRENTLY

Ex.

Title: LOCAL DATA DELIVERY THROUGH BEACONS

Commissioner for Patents
Washington, D.C. 20231



AUTHORIZATION PURSUANT TO 37 CFR §1.136(a)(3)
AND TO CHARGE DEPOSIT ACCOUNT

Sir:

The Commissioner is hereby requested and authorized to treat any concurrent or future reply in this application requiring a petition for extension of time for its timely submission, as incorporating a petition for extension of time for the appropriate length of time.

Please charge any additional fees which may now or in the future be required in this application, including extension of time fees, but excluding the issue fee unless explicitly requested to do so, and credit any overpayment, to Deposit Account No. 14-1270.

Respectfully submitted,

By
Michael E. Marion, Reg. 32,266
Attorney
(914) 333-9641



PH 6000112
U.S.A.
I-II



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ


JC978 U.S. PTO
09/873568
06/04/01


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

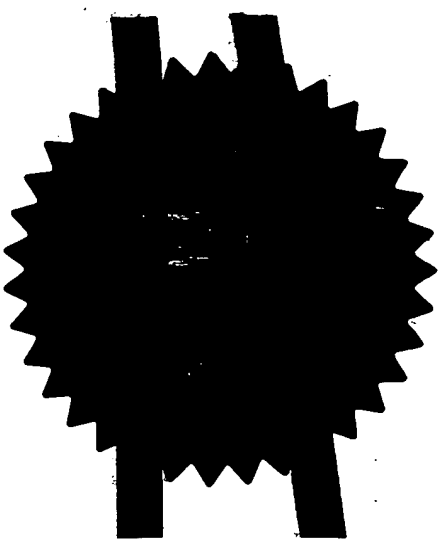

Signed 
Dated 29 MAY 2001

CERTIFIED COPY OF
PRIORITY DOCUMENT

Request for grant of a patent

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE

26 JUN 2000

NEWPORT

The Patent Office

Cardiff Road

Newport

 26 JUN 00 15:48:24 0015452.6
 P0177700 0.00 0015452.6

1. Your reference

PHGB 000086

2. Patent application number

(The Patent Office will fill in this part)

0015452.6

26 JUN 2000

3. Full name, address and postcode of the or of each applicant (underline all surnames)

KONINKLIJKE PHILIPS ELECTRONICS N.V.

GROENEWOUDSEWEG 1

5621 BA EINDHOVEN

THE NETHERLANDS

Patents ADP Number (if you know it)

7586605002

If the applicant is a corporate body, give the country/state of its incorporation

THE NETHERLANDS

4. Title of the invention

LOCAL DATA DELIVERY THROUGH BEACONS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ANDREW GORDON WHITE

Philips Corporate Intellectual Property

Cross Oak Lane

Redhill

Surrey

RH1 5HA

Patents ADP number (if you know it)

7133473002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

 Priority Application number
 (if you know it)

 Date of filing
 (day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

 Date of filing
 (day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

YES

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.

Do not count copies of the same document.

Continuation sheets of this form	17
Description	5
Claims(s)	1
Abstract	4
Drawings	

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)


Any other documents

(*Please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

23/6/2000

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 815299

(A. G. WHITE)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and when to pay please contact the Patent Office.

DESCRIPTION**LOCAL DATA DELIVERY THROUGH BEACONS**

5 The present invention relates to services offered to users of electronic equipment, especially but not exclusively to users of mobile communications devices such as portable telephones and suitably equipped PDA's (personal digital assistants). The invention further relates to means for delivery of such services, and to portable devices for receiving them.

10 Recent years have seen a great increase in subscribers world-wide to mobile telephone networks and, through advances in technology and the addition of functionalities, cellular telephones have become personal, trusted devices. A result of this is that a mobile information society is developing, with
15 personalised and localised services becoming increasingly more important. Such "Context-Aware" (CA) mobile telephones are used with low power, short range base stations in places like shopping malls to provide location-specific information. This information might include local maps, information on nearby
20 shops and restaurants and so on. The user's CA terminal may be equipped to filter the information received according to pre-stored user preferences and the user is only alerted if an item of data of particular interest has been received.

 An example of a CA terminal is given in U.S. patent 5,835,861 which discloses the use of wireless telephones within the context of advertisement billboards. The user of a wireless telephone obtains the telephone number of a
25 vendor by activating his/her wireless telephone to transmit a prompt signal to an active advertisement source and to receive from the advertisement source a response signal containing the telephone number of the advertising vendor. The telephone number can then be used to automatically place a call to that vendor via the public switched telephone network. Alternatively, the telephone
30 number can be stored for use later on. This arrangement can be used to place a call to a vendor without having to either memorise the telephone number or

to write it down. The signals between the billboard and the caller can be transmitted as modulated infrared (IR) signals.

It will be recognised that an important requirement for CA devices is that they quickly and efficiently gather data from beacons such that the user is not required to undertake actions such as staying close to a beacon whilst contact is established between portable device and beacon, nor having to specifically initiate interaction (as is the case with the above-mentioned system in US 5,835,861).

The existing methodology for implementing a radio beacon is to perform a two-step connection process, commencing with the discovery of devices followed by the actual transmission of the information using the same device. Bluetooth, one of the technologies/protocols available for building such systems, requires that the discovery phase is completed before a transmission can take place. When used in a dynamic mobile environment, the time this process takes can often be longer than the actual time the device is in range, causing the information not to reach the client.

From this it can be seen that two issues are important when relaying information via a beacon to mobile clients, the first of which is the time taken for the transaction to be completed. Due to the mobility of the clients and the typically small range of beacons, the time taken for a transaction to be performed is critical. Should the time for this interaction to be performed in full (i.e. from an inquiry stage to the actual service interaction) be too long, the client will be out of range of the beacon and will not have received the service information.

The second issue is the power consumption of the mobile device. Since the mobile device is required to be compact and light, power consumption is an issue when adding additional functionality to the device. Many individual beacons, each performing their own inquiry will require the device to transmit frequently. Since each transmission requires significantly more power than reception, this can quickly drain the available power.

It is therefore an object of the invention to provide a system for the delivery of data via beacons whereby the establishment of a link between beacon and portable device occurs relatively quickly and without excessive power drain on the portable device.

5 In accordance with a first aspect of the present invention there is provided a communications system comprising first and second beacon devices capable of wireless message transmission and at least one portable device capable of receiving such message transmissions, wherein said first beacon is arranged to broadcast a series of inquiry messages according to a
10 first communications protocol, wherein said at least one portable device is arranged to detect such inquiry messages and reply with an identifier for the portable device, wherein said first beacon device is arranged to transmit a received identifier to said second beacon, and wherein said second beacon and portable device are configured to perform a service interaction when
15 triggered by the second beacon receiving the portable device identifier.

Whilst the foregoing requires the portable device to go through both an inquiry and paging process, the ability of the first beacon to issue inquiry packets continuously makes the progress quicker. Furthermore, by having the second beacon handle all interactions, the first beacon does not have to pause
20 operation to issue page messages, nor does it have to stop to allow interactive traffic. As a consequence, the portable device never has to wait for the first beacon to enter inquiry mode, which represents a significant saving.

The system may comprise just one or a plurality of second beacon devices, each arranged to receive identifiers from the first beacon, and there is
25 suitably a secure data channel linking the first to the or each second beacon device for the transmission of received identifiers.

The second beacon device may maintain and periodically update a list of identifiers for portable devices with which a service interaction is being performed. To remove redundant entries, the system may feature a timer, with
30 the second beacon device being configured to remove a portable device identifier from the list if no interaction takes place for a predetermined period. As an alternative, or addition, the second beacon device may remove a

portable device identifier from said list if a duplicate copy of that identifier is received from said first beacon device. As a yet further alternative, the second beacon device may remove a portable device identifier from the list if the interaction includes receipt of a predetermined message requesting removal
5 from said portable device, that is to say if the user specifically terminates the interaction.

In an extension to the system, each inquiry message may be in the form of a plurality of data fields arranged according to the first communications protocol, with the first beacon device being further arranged to add to each
10 inquiry message prior to transmission an additional data field, and with the at least one portable device being arranged to receive the transmitted inquiry messages and read data from said additional data field. This additional data field, which provides for the piggy-back transmission of broadcast messages on the inquiry messages, is suitably positioned at the end of a respective
15 inquiry message such that it will be ignored by non-broadcast terminals supporting the first communications protocol, which protocol suitably (but not essentially) comprises Bluetooth messaging.

With such broadcasting on the inquiry messages, the first beacon device is suitably configured to broadcast a series of inquiry messages on a
20 predetermined clocked succession of frequencies, with clock information for said first beacon device being included in data carried by said additional data field.

Also in accordance with the present invention there is provided a mobile communication device for use in the above-recited system, the device
25 comprising a receiver capable of receiving a short-range wireless inquiry message, processing means operable to process data contained within said message and compose a response message including an identifier for the device, and transmission means configured to wirelessly transmit said composed response message to the source of the inquiry message.

30 Further in accordance with the present invention there is provided a communications infrastructure for use with the above mobile communication device in the communications system recited above, the infrastructure

comprising first and second beacon devices and an interconnection therebetween, said beacon devices being capable of wireless message transmission to said at least one portable device, wherein said first beacon is operable to broadcast a series of inquiry messages according to a first communications protocol, to detect any response messages containing a portable device identifier for said portable device, and to transmit a received identifier to said second beacon, and wherein said second beacon is configured to perform a service interaction with said portable device when triggered by the second beacon receiving the portable device identifier. In such an infrastructure, the interconnection between the first and second beacon devices may suitably comprise a secure data channel to provide security for the mobile device identifiers.

Yet further in accordance with the present invention there is provided a method for enabling the user of a portable communications device to perform a service interaction with a beacon device in an environment containing at least first and second beacon devices capable of wireless message, wherein a first beacon broadcasts a series of inquiry messages according to a first communications protocol, the users portable device detects such inquiry messages and replies with an identifier for the portable device, the first beacon device transmits a received identifier to said second beacon, and the second beacon and portable device perform said service interaction when triggered by the second beacon receiving the portable device identifier.

Further features and advantages of the present invention are recited in the attached claims, the disclosure of which is incorporated herein by reference, and to which the user is now directed.

Preferred embodiments of the invention will now be described, by way of example only, and with reference to the accompanying drawings, in which:

Figure 1 is a block schematic diagram of a beacon and portable device embodying the invention;

Figure 2 is a block schematic diagram representing message establishment and hand-over in a system of multiple beacons;

Figure 3 is an overview of a beacon distribution for an interconnected system in a location such as a shop;

Figure 4 is a schematic diagram of a series of devices in a linked beacon infrastructure;

5 Figure 5 is a chart illustrating the transmission of a train of inquiry access codes centred on a given frequency ;

Figure 6 illustrates alternation between trains of inquiry messages over the duration of an inquiry broadcast;

10 Figure 7 illustrates the insertion of a packet of broadcast data within an existing transmission slot;

Figure 8 illustrates a first arrangement for sending beacon clock data in a sequence of inquiry message trains; and

Figure 9 illustrates an alternate arrangement to that of Figure 8 for the sending of beacon clock data.

15

In the following description we consider particularly a CA application which utilises Bluetooth protocols for communication of messages from beacon to portable device (whether telephone, PDA or other). As will be recognised, the general invention concept linked beacons, together with the subsidiary feature of including a broadcast channel as part of the inquiry procedure, is not restricted to Bluetooth devices, and is applicable to other communications arrangements, in particular frequency hopping systems. The subsidiary feature is described in greater detail in the commonly-assigned and concurrently pending application entitled "Data Delivery Through Beacons".

25 Figure 1 is a block schematic diagram of a CA mobile telephone 10 in use with a pair of interconnected low power, short range base stations or beacons 12, 14. As mentioned previously, and discussed in greater detail below, such an arrangement may be used in places like shopping malls to provide location-specific information such as local maps, information on nearby
30 shops and restaurants and so on, with a beacon downloading information keys to a mobile device. An information key is a small data object that provides a reference to a source of full information, and it is in the form of a number of

predetermined fields, one of which will contain a short piece of descriptive text presented to a user. Another field will be a pointer or address of some form, for example a URL or telephone number. Other supplementary fields may control how the data is presented to a user and how the address may be exploited. A beacon will generally broadcast cyclically a number of these keys, each typically relating to a different service although, as will be recognised, waiting for the appropriate key can sometimes be a time-consuming business.

Issues relating to the beacon construction and configuration include the beacons range which will be dependent on output power (typical range being 1mW to 100mW), levels of local interference, and receiver sensitivity.

The user's CA terminal 10 comprises an aerial 16 coupled with transceiver stage 18 for the reception and transmission of messages. Outgoing messages result from user input to the telephone, either audio input via microphone 20 and A/D converter 22 or other data input via the keypad or other input means 24. These inputs are processed to message data format by signal and data processing stage 26 and converted to transmission format by encoder 28 before being supplied to the transceiver stage 18.

Messages received via the aerial 16 and transceiver 18 are passed via a decoding stage 30 to a filtering and signal processing stage 32. If the data carried by the message is for presentation on a display screen 34 of the telephone, the data will be passed to a display driver 36, optionally after buffering 38, with the driver formatting the display image. As will be recognised, the display 34 may be a relatively simple low-resolution device, and the conversion of received data to display data may be carried out as a subset of the processing stage 32 functionality, without the requirement for a dedicated display driver stage.

Where the message is carrying data from one of the beacons 14, the telephone has the ability to filter the information received according to pre-stored 40 user preferences and the user is only alerted (i.e. the information will only be retained in buffer 38 and/or presented on screen 34) if comparison of stored preference data and subject matter indicators in the message indicate that an item of data of particular interest has been received.

For conventional audio messages, the audio data is output by the filter and processing stage 32, via D/A converter 42 and amplifier 44 to an earphone or speaker 46. Receipt of such messages from the telephone network 48 is indicated by arrow 50: the telephone network 48 also provides
5 the link from the telephone 10 to a wide-area network (WAN) server 52 and, via the WAN 54 (which may be the internet), to one or more remote service providers 56 providing a source of data for the telephone 10.

Communication between the CA terminal (telephone 10) and the CA base stations (beacons 12 and 14) takes two forms: 'push' and 'pull'. In 'push'
10 mode, inquiry information is broadcast by the beacon 12 to all portable terminals 10 in the form of a short 'key' indicated at 60. As will be described in detail below, the telephone 10 responds to the inquiry key by sending an identifier for itself to the first beacon 12, which then transfers the interaction to the second beacon 14 whilst the first continues to broadcast inquiry keys.

15 Other forms of key are received by the terminal 10 'unconsciously', that is, without direct intervention by the user, and automatically filtered according to the user's pre-set preferences. Some will be discarded, some kept for further study, others might cause the user to be alerted immediately. By way of example, shops might choose to push details of special offers into passing
20 terminals in the knowledge that users who have interest and have therefore set their filters 32 accordingly will be alerted by their terminal.

Sometimes the user will wish to obtain more information than is contained in the keys. Here, 'pull' mode allows a user to set up a connection with a server 56 (which need not necessarily be specially configured for CA use) and
25 actively request information to pull down into the terminal 10. This mode is therefore typically interactive.

As mentioned above, in the present case, one beacon 12 is labelled as an 'inquirer' beacon and it sends out Bluetooth inquiry messages constantly. The (or each) other beacons are labelled as 'interactor' beacons and allowed
30 to communicate with terminals 10 on a one-to-one basis on request. Here, the inquiry procedure is performed by an inquirer beacon 12 and the paging procedure by an interactor beacon 14. By delegating the functions this way, it

is possible to save a considerable amount of time that would otherwise be lost in attempts to join piconets.

Figure 2 is a block schematic of a dual beacon system: in this basic system, there is one inquirer beacon 12 and one interactor 14. The inquirer beacon 12 constantly transmits inquiry packets (1), which are used to discover the identities of any clients - portable devices - in range of the beacon. Once a client comes into range, it will respond to the inquiry (2), giving the inquirer information about its identity.

The information about the clients discovered is then transmitted over a secure channel (typically over fixed infrastructure) to the interactor beacon 14 (3) – a beacon solely concerned with transmitting information to the client. This then begins service interaction (4) by issuing a page message containing the client's identity to which the client will respond.

Although the client is obliged to go through the inquiry and paging processes, the fact that the inquirer can issue inquiry packets continuously makes the process much quicker. The use of a separate beacon 14 for all interactions means that the inquirer does not have to pause to issue page messages, nor does it have to stop to allow interactive traffic. The client therefore never has to wait for the inquirer to enter inquiry mode. This in itself is a significant saving of time. As an added bonus, the interactor beacon does not have to wait for an Inquiry cycle to complete before issuing a page message and some seconds can be saved here as well.

Figure 3 is a schematic of a multiple beacon network where the idea above can be extended to larger networks containing several interactors A, B, C, and, often, more than one inquirer I.

Multiple interactors can be associated with one inquirer allowing location-specific content to be sent to the client. As with the dual beacon system, the inquirer passes the identities of clients to all interactors in the network. This means that, while a client remains in range of the network, it will only ever have to go through the inquiry process once.

Once the interactors know the identities of the clients, these can then begin the task of performing the service interaction. They can all page all

clients continuously. When a client walks within range of one interactor, it will respond to the page by setting up a link with that interactor. The other interactors will typically cease paging for that client until the link is cleared. More advanced paging schemes will page only in nearby cells on the grounds that the user will have to walk through one or more of them before he can reach cells located further away. This way, large systems can page in economical fashion. Other paging strategies are also possible.

An alternative approach is to allow the terminal to request that it be placed in parked mode. In parked mode, the terminal is given a special identity by the interactor (as a Bluetooth master). It then sleeps for much of the time, waking periodically to resynchronise itself to the master and to listen to special beacon messages for possible instructions, including page messages. If the user decides to perform some interaction, the terminal wakes up and requests a link with the master. Interactive operation can then proceed as before.

In the wide area network set up, the terminal's special park mode identity is known to all interactor beacons in the system. This gives the ability for the terminal to enter park mode at one site and wake up at another without the need to go through the inquiry process.

As mentioned, more than one inquirer beacon may be part of the system. A shopping mall might place one at each entrance to the building, for example. Naturally, with such a distributed system, it will not matter at which inquirer beacon the client terminal completes the inquiry process.

By spreading the functions of Inquiry and interaction, considerable savings in time are achieved because the need to sign up to a piconet at each beacon is removed. As it stands, however, the client still needs to request information of the interactor beacons, even broadcast information. This requires the client to transmit and, in so doing, reveal its identity before establishing whether or not the information available is of any interest. A mechanism for sending broadcast information over inquiry packets is described in the above-referenced co-pending application and summarised below with reference to Figures 4 to 9, and this scheme can be combined with

the distributed fixed part architecture approach just discussed with considerable advantage.

With a multiple beacon network, more inquiry beacons used to offer broadcast information at various locations could supplement the distributed architecture developed above. A client that wants to know more about a particular piece of information issued by an inquirer can turn to any interactor and set up an interactive link. As a possible bonus, the terminal does not have to submit to the inquiry process as it enters the shopping but may hold off until such time as it discovers an interesting broadcast message.

Several other functions can take advantage of a distributed fixed part network. Of these, one of the most important is call hand over or handoff. This function allows a terminal, which has a link active, to transfer the link from one fixed cell to another, ideally (for voice mode) in a seamless fashion. By distributing the management of terminal identities and link functions at the fixed side, hand over in large area, multiple cell fixed networks becomes possible in Bluetooth and similar protocols.

Beacons may be wholly or partially networked with at least some coordination as to their broadcast messages. Figure 4 is a diagram of such a system 100 of linked beacons embodying the invention and providing an implementation of an infrastructure for use in, for example, department stores, shopping malls, theme parks, etc. The system 100 comprises a plurality of beacons 102, 104, 106, 108 distributed over a series of locales. Each of the beacons 102-108 broadcasts one or more short-range inquiry signals in a time-slot format as described in greater detail hereinafter. The beacons 102 - 108 are controlled by a beacon infrastructure server (BIS) 110, with one or more terminals 112, 114, 116, 118 being connected to the server 110. The terminals 112 - 118 enable service providers, i.e., the users of beacons 102 - 108, to author or edit allocated service slots in the form of added data piggy backed on inquiry facilitation signals transmitted by beacons 102 - 108. A service provider may lease a beacon or one of the beacon's service slots from the infrastructure provider. To this end, server 110 provides simple HTML templates for filling out by the user via one of terminals 112 - 118. Having filled

out the template with, for example, a description of the service and other information for the data to be carried via the beacon broadcast, the template is returned to server 110, preferably via a secure link using, e.g., Secure HTTP (S-HTTP) or Secure Sockets Layer (SSL). SSL creates a secure link between
5 a client and a server, over which any amount of data can be sent securely. S-HTTP is designed to transmit individual messages securely. Server 110 then creates the appropriate additional data package for appending to the inquiry signal of a relevant one of the beacons 102 - 108 based on the information submitted with the template. The system 100 may further comprise an
10 application server 120 to assist in carrying out various functions, as will be readily understood by the skilled reader.

Referring back to Figure 1, a strong candidate technology for the wireless link necessary for at least the 'push' mode of the above-described CA system is Bluetooth, on the grounds that it is expected to become a
15 component part of a large number of mobile telephones 10. In analysing the Bluetooth protocol for CA broadcast or 'push' mode utilisation, a problem may be seen. In the ideal case, the terminal 10 will detect fixed beacon 12, and extract basic information from it without the terminal 10 needing to transmit at all. However, this type of broadcast operation is not supported by the current
20 Bluetooth specification.

In part, the incompatibility follows the frequency hopping nature of Bluetooth beacon systems which means that, in order for broadcast messages (or, indeed, any messages) to be received by a passing terminal, the terminal has to be synchronised to the beacon in both time and frequency. The
25 portable device 10 has to synchronise its clock to the beacon clock and, from the beacons identity, deduce which of several hopping sequences is being employed.

To make this deduction, the portable device has conventionally been required to join – as a slave – the piconet administered by the beacon as
30 piconet master. Analysis of the inquiry and page procedures indicates that the time taken to join a piconet and then be in a position to receive information from the master could be several tens of seconds, which is much too long for

CA applications, where a user may move out of range of a beacon before joining could be completed.

The difficulty of receiving broadcast data from beacons is caused at least partially by the frequency-hopping nature of Bluetooth and similar systems. The Bluetooth inquiry procedure has been proposed specifically to solve the problem of bringing together master and slave: the applicants have recognised that it is possible to piggy-back a broadcast channel on the inquiry messages issued by the master. Only CA terminals need read the broadcast channel messages and only CA base stations or beacons send them. In consequence, at the air interface, the mechanism is entirely compatible with conventional (non-CA) Bluetooth systems.

To illustrate how this is implemented, we first consider how the Inquiry procedures themselves operate, with reference to Figures 5 and 6. When a Bluetooth unit wants to discover other Bluetooth devices, it enters a so-called inquiry substate. In this mode, it issues an inquiry message containing a General Inquiry Access Code (GIAC) or a number of optional Dedicated Inquiry Access Codes (DIAC). This message is repeated at several levels; first, it is repeated in a train A of 16 frequencies from a total of 32 making up the inquiry hopping sequence. The message is sent twice on two frequencies in even timeslots with the following, odd timeslots used to listen for replies on the two corresponding inquiry response hopping frequencies. Sixteen frequencies and their response counterparts can therefore be covered in 16 timeslots, or 10ms. The chart of Figure 5 illustrates the transmission of a single train on sixteen frequencies centred around $f\{k\}$, where $f\{k\}$ represents the inquiry hopping sequence.

The next step is the repetition of the train at least N_{inquiry} times. At the very least, this means 256 repetitions of the entire train. Finally, the train A is swapped for the train B consisting of the remaining 16 frequencies and the cycle repeated. As shown by Figure 6, the specification states that this switch must occur at least three times to ensure the collection of all responses in an error-free environment. This means that an inquiry broadcast could take at least 10.24 seconds.

A portable device that wants to be discovered by a beacon enters the inquiry scan substate. Here, it listens for a message containing the GIAC or DIAC's of interest. It, too, operates in a cyclic way. It listens on a single hop frequency for an inquiry scan period of $T_{w_inquiry_scan}$. This must be long enough
5 to cover the 16 inquiry frequencies used by the inquiry. The interval between the beginning of successive scans must be no greater than 1.28 seconds. The frequency chosen comes from the list of 32 making up the inquiry hopping sequence.

On hearing an inquiry containing an appropriate IAC, the portable
10 device enters a so-called inquiry response substate and issues a number of inquiry response messages to the beacon. The beacon will then page the portable device, inviting it to join the piconet.

As mentioned above and shown in Figure 6, it is proposed that the inquiry messages issued by the base station have an extra field appended to
15 them, capable of carrying a user-defined payload (CA DATA). In the CA scenario, this payload is used to carry broadcast information, or keys, to CA terminals during the inquiry procedure. By adding the field to the end of the inquiry message, it will be appreciated that non-CA receivers can ignore it without modification. In addition, by using a CA-specific DIAC, CA receivers
20 can be alerted to the presence of the extra information field.

The presence of the extra data field means that the guard space conventionally allowed at the end of a Bluetooth inquiry packet is reduced. However, this space - provided to give a frequency synthesiser time to change to a new hop frequency - will be generally unused otherwise, as current
25 frequency synthesisers are capable of switching at speeds which do not need extension into the extra guard space. The standard inquiry packet is an ID packet of length 68 bits. Since it is sent in a half-slot, the guard space allocated is $(625/2 - 68) = 244.5 \mu s$ (625 μs slot period, 1 Mbit/s signalling rate). Modern synthesisers can switch in much less time with figures of 100 μs
30 or lower considered routine by experts in the field. Applicants therefore propose allocation of 100 bits as a suitable size for this new field.

CA handsets can receive the broadcast data quickly without being required to run through a lengthy procedure to join a piconet. In addition, since there is no need for the handset to transmit any information whatsoever, there is a consequent power saving that will be particularly important in dense environments where many CA base stations may be present. Nevertheless, when the handset is in interactive mode and wishes to join a piconet in order to obtain more information, it may employ the default inquiry procedures as normal. There is no loss of functionality through supporting the additional data field.

In a typical embodiment, four of our 100 bits will be lost as trailer bits for the ID field; this is a consequence of it being read by a correlator. Of the 96 bits remaining, applicants preferred allocation is that 64 be used as data and 32 as a 2/3 FEC (forward error correction) checksum. Each inquiry burst thus contains 8 bytes of broadcast data. In a most common scenario, by the second group of A and B trains the portable device has found the base station, understood it to be a CA beacon and is awaiting the broadcast data. Since it will be listening specifically, the portable device will at least be able to read 256 bursts of data twice (A and B), giving us two lots of 2 Kbytes, or 4 Kbytes in total.

At this stage, the portable device does not know the phase of the beacons clock because this information is not been transmitted. To assist the portable device, clock information is transmitted in at least some of the trains in the first A and B groups, as shown in Figure 8, together with some auxiliary information indicating when the next switches between A and B will occur. This clock information will be transmitted in place of the CA broadcast data so means are provided to discriminate between the two data channels. Use of separate DIAC's is one possible method.

In the case where the portable device knows the timing of the beacon, the portable devices also knows how it will hop, which gives the ability to track all transmissions of a train. Since there are 16 transmissions in a frame, then the resultant CA channel has 16 times as much capacity and can convey 64 Kbytes of information.

Since the terminal wakes up every 1.28 seconds or less, it will generally have obtained the clocking information it needs by the half way mark in the first A or B periods. Switching from clock to data at these halfway marks, as illustrated in Figure 9, provides a number of useful advantages. Firstly, some data can be received in less than five seconds from the start of the inquiry procedure. Secondly, the terminal can still respond to an important key by automatically issuing an inquiry response message to the base station (if that is the appropriate action for the terminal to take) even if the key appears comparatively late in the cycle. It will be noted that no increase in capacity is assumed.

In the foregoing, a portable device will receive all the additional data field packets on one of the 32 inquiry channels, thereby using only 1/32 of the available bandwidth. As will be recognised, if the uncertainty as to when a portable terminal (beacon slave) receives the first inquiry packet can be overcome, the predetermined nature of the hopping sequence may be accommodated and the full bandwidth therefore utilised. For a slave to synchronise with a masters inquiry hopping sequence from the point where it received the first packet, the slave needs to know both the masters clock offset and the position of the first received packet in the masters hopping sequence. In the following example, it is assumed that the master follows the Bluetooth minimum enquiry procedure, which comprises 256 repetitions of the 16-channel inquiry hopping sequences, with three train switches (as in Figure 6). Each sweep across the 16 channels takes 10ms.

To synchronise the slave hopping, the additional data field (BCD; Fig. 1) carries the following information:

- Master clock offset (2 bytes);
- Number of full train repetitions (1 byte) – assuming that a full train consists of 256 repetitions of 10ms trains, the range of this parameter is 0-255 (before the inquiry switches to the next full train). This indicates to the slave when the master will next switch the full train.

- How many full train switches have been completed in the current inquiry cycle (1 byte) – this data indicates to the slave what the master is likely to do at the end of the current full train, i.e. whether it will switch over to another full train or whether the inquiry procedure will terminate.

5

As long as no channel repeats in the 10ms train, no field is required to indicate the position of the current channel in the hopping sequence as the slave is able to derive this from knowledge of the sequence.

From the foregoing it will be seen that, by adding 4 bytes to each additional field packet, the slave can then pick up all additional field packets to the end of the inquiry, whilst still having 4 bytes available (from our preferred assignment of 64 from 100 bits for data) to carry broadcast data.

Considering a complete beacon signal, it will be readily understood that it will need to be divided into a number of 4-byte packets with one being sent with each inquiry packet. Assuming a fixed length of beacon signal for the purposes of illustration, at 16kB the full signal can be accommodated on a single inquiry train (a train being 256 repetitions of the 16-channel hop sequence, giving $256 \times 16 \times 4$ bytes = 16kB).

Extending this, by fixing that the first packet of a beacon signal goes on the first packet of an inquiry train, from the message indicator field for the number of repetitions for the current 16-channel hopping sequence in the message header, the slave is enabled to derive the position of the beacon packet it has received in the complete beacon signal.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of fixed and portable communications systems, and systems and components for incorporation therein and which may be used instead of or in addition to features already described herein.

30

CLAIMS:

1. A communications system comprising first and second beacon devices capable of wireless message transmission and at least one portable device capable of receiving such message transmissions, wherein said first beacon is arranged to broadcast a series of inquiry messages according to a first communications protocol, wherein said at least one portable device is arranged to detect such inquiry messages and reply with an identifier for the portable device, wherein said first beacon device is arranged to transmit a received identifier to said second beacon, and wherein said second beacon and portable device are configured to perform a service interaction when triggered by the second beacon receiving the portable device identifier.

5

10
2. A system as claimed in Claim 1, comprising a plurality of second beacon devices, each arranged to receive identifiers from the first beacon.

15
3. A system as claimed in Claim 1, further comprising a secure data channel linking said first and second beacon devices and for the transmission of received identifiers.

20
4. A system as claimed in Claim 1, wherein the second beacon device maintains and periodically updates a list of identifiers for portable devices with which a service interaction is being performed.
5. A system as claimed in Claim 4, further comprising a timer, with said second beacon device being configured to remove a portable device identifier from said list if no interaction takes place for a predetermined period.

25
6. A system as claimed in Claim 4, wherein said second beacon device is configured to remove a portable device identifier from said list if a duplicate copy of said identifier is received from said first beacon device.

30

7. A system as claimed in Claim 4, wherein said second beacon device is configured to remove a portable device identifier from said list if said interaction includes receipt of a predetermined message requesting removal from said portable device.

5

8. A system as claimed in Claim 1, wherein each inquiry message is in the form of a plurality of data fields arranged according to said first communications protocol, wherein the first beacon device is further arranged to add to each inquiry message prior to transmission an additional data field, and wherein the at least one portable device is arranged to receive the transmitted inquiry messages and read data from said additional data field.

10

9. A system as claimed in Claim 8, wherein the first beacon device is arranged to add said additional data field at the end of a respective inquiry message.

15

10. A system as claimed in Claim 8 or Claim 9, wherein the first beacon device is arranged to include an indication in one of said predetermined data fields, said indication denoting the presence of said additional data field.

20

11. A system as claimed in any of Claims 1 to 10, wherein said first communications protocol comprises Bluetooth messaging.

25

12. A system as claimed in Claim 11, wherein the first beacon device is configured to broadcast a series of inquiry messages on a predetermined clocked succession of frequencies, with clock information for said first beacon device being included in data carried by said additional data-field.

30

13. A mobile communication device for use in the system of any of Claims 1 to 12, the device comprising a receiver capable of receiving a short-range wireless inquiry message, processing means operable to process data

contained within said message and compose a response message including an identifier for the device, and transmission means configured to wirelessly transmit said composed response message to the source of the inquiry message.

5

14. A communications infrastructure for use in the communications system of Claim 1, the infrastructure comprising first and second beacon devices and an interconnection therebetween, said beacon devices being capable of wireless message transmission to said at least one portable device, 10 wherein said first beacon is operable to broadcast a series of inquiry messages according to a first communications protocol, to detect any response messages containing a portable device identifier for said portable device, and to transmit a received identifier to said second beacon, and wherein said second beacon is configured to perform a service interaction with 15 said portable device when triggered by the second beacon receiving the portable device identifier.

15. A communications infrastructure as claimed in Claim 14, wherein said interconnection between the first and second beacon devices comprises a 20 secure data channel.

16. A method for enabling the user of a portable communications device to perform a service interaction with a beacon device in an environment containing at least first and second beacon devices capable of wireless 25 message, wherein a first beacon broadcasts a series of inquiry messages according to a first communications protocol, the users portable device detects such inquiry messages and replies with an identifier for the portable device, the first beacon device transmits a received identifier to said second beacon, and the second beacon and portable device perform said service interaction 30 when triggered by the second beacon receiving the portable device identifier.

17. A method as claimed in Claim 16, wherein the second beacon device maintains and periodically updates a list of identifiers for portable devices with which a service interaction is being performed.

5 18. A method as claimed in Claim 17, wherein the second beacon device removes a portable device identifier from said list if no interaction takes place for a predetermined period.

10 19. A method as claimed in Claim 17, wherein the second beacon device removes a portable device identifier from said list if a duplicate copy of said identifier is received from the first beacon device.

15 20. A method as claimed in Claim 17, wherein the second beacon device removes a portable device identifier from said list if said interaction includes receipt of a predetermined message requesting removal from said portable device.

20 21. A method as claimed in Claim 16, wherein said inquiry messages are each in the form of a plurality of predetermined data fields arranged according to said first communications protocol, wherein the first beacon device adds to each inquiry message prior to transmission an additional data field carrying broadcast message data, and wherein the portable device receives the transmitted inquiry messages and reads the broadcast data from said additional data field.

25

22. A method as claimed in Claim 21, wherein the first beacon device adds said additional data field at the end of a respective inquiry message.

30 23. A communications system substantially as hereinbefore described with reference to the accompanying drawings.

24. A portable communications device substantially as hereinbefore described with reference to the accompanying drawings.

5 25. A communications infrastructure comprising first and second linked beacons substantially as hereinbefore described with reference to the accompanying drawings.

10 26. A method for enabling the user of a portable communications device to receive broadcast messages substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACT**LOCAL DATA DELIVERY THROUGH BEACONS**

5 A communications system comprises first (12) and second (14) beacon
devices capable of wireless message transmission and at least one portable
device (10) capable of receiving such message transmissions. The first
beacon is arranged to broadcast a series of inquiry messages (INQ) according
to a first communications protocol, such as Bluetooth. The portable device (10)
10 detects such inquiry messages and replies with an identifier for the portable
device. The first beacon (12) then transmits the received identifier to the
second beacon (14), with the second beacon (14) and portable device (10)
configured to perform a service interaction when triggered by the second
beacon receiving the portable device identifier.

15

(Figure 1)

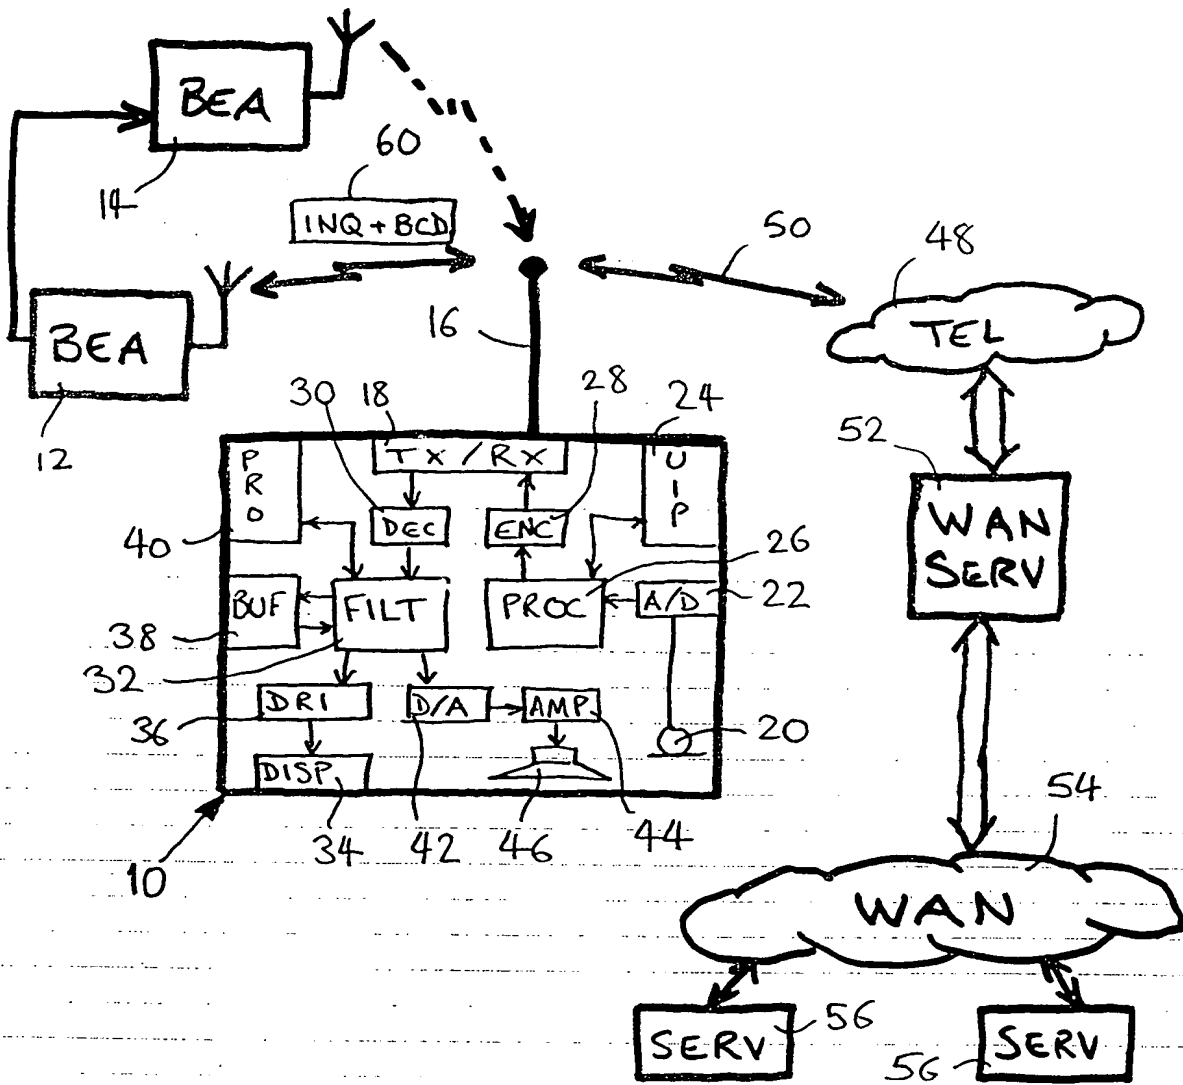
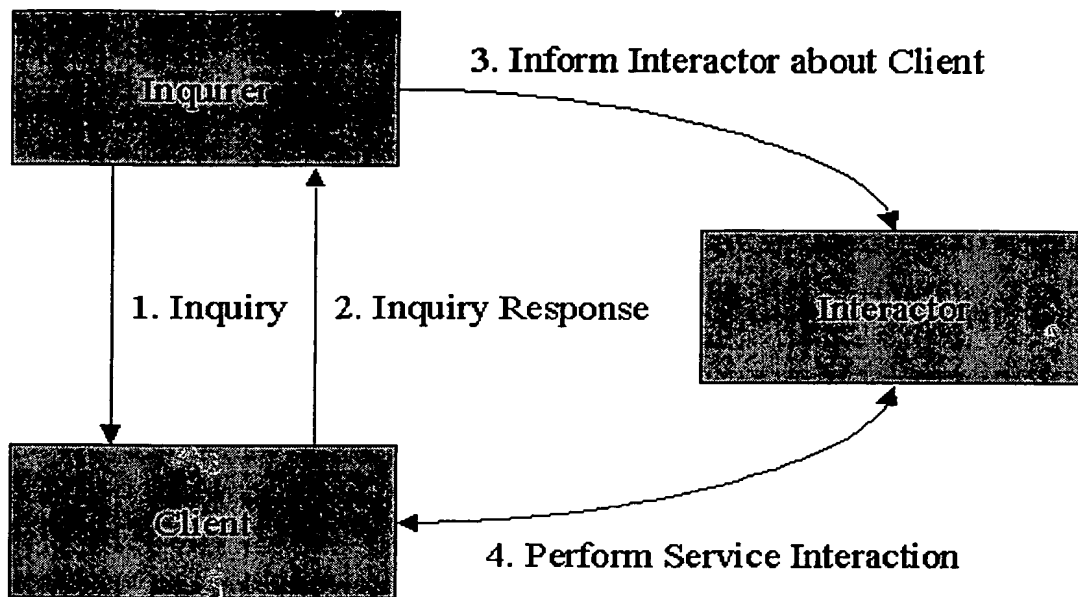
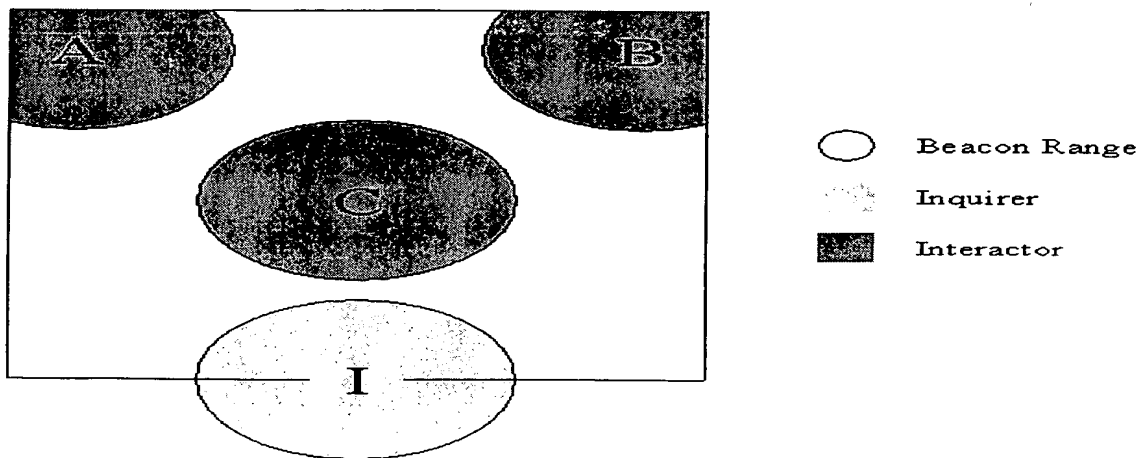


Fig. 1

**Fig. 2****Fig. 3**

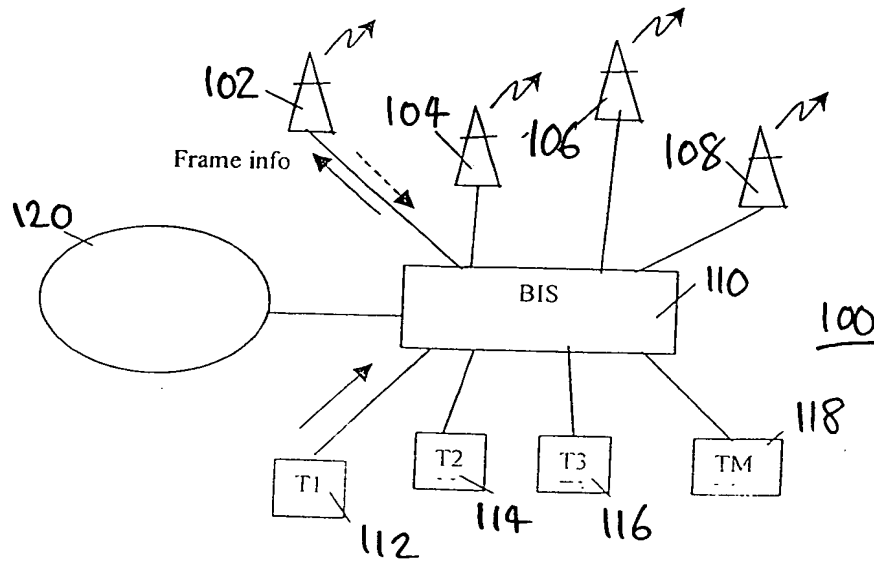


Fig. 4

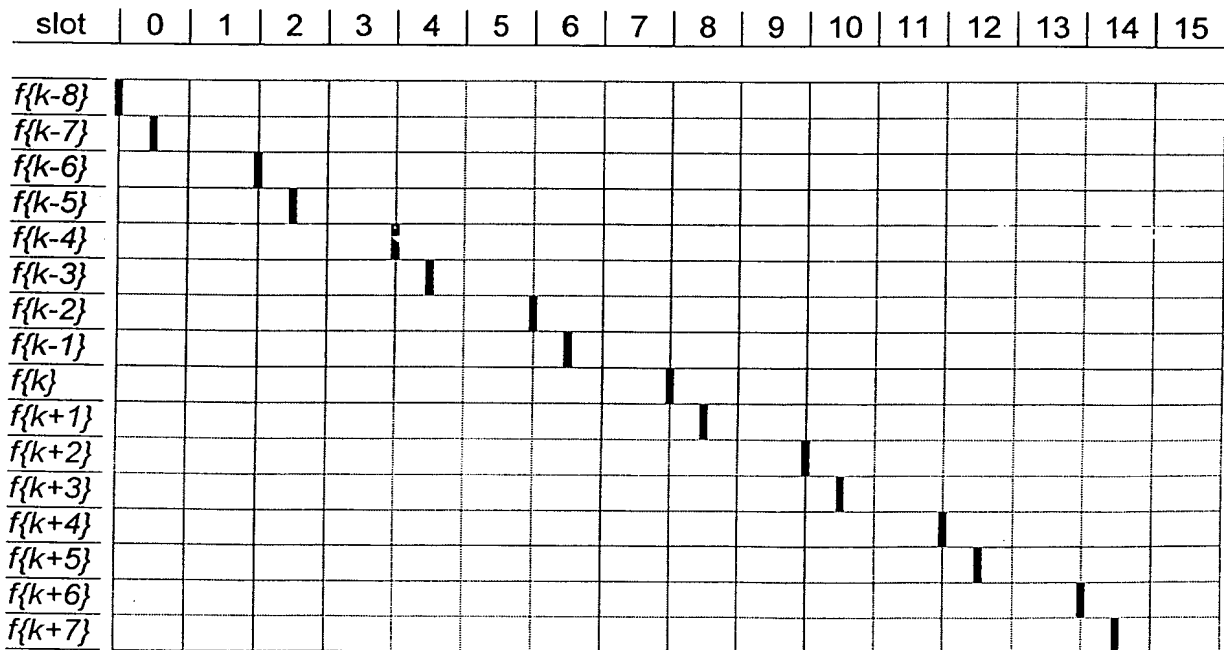


Fig. 5

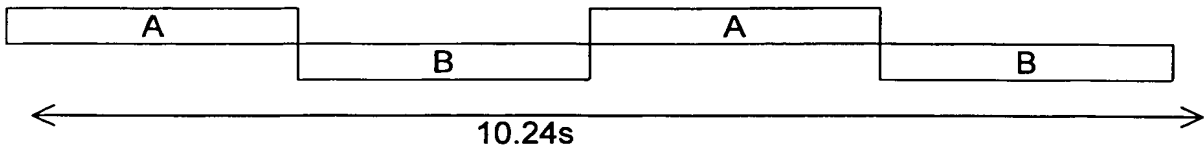


Fig. 6



Fig. 7

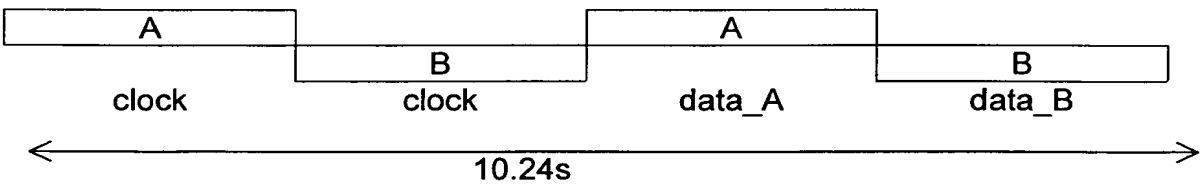


Fig. 8

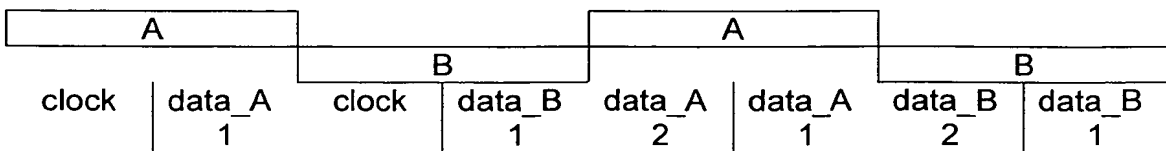


Fig. 9